



To Enable Bamboo Server for Cmd-1 in preview mode

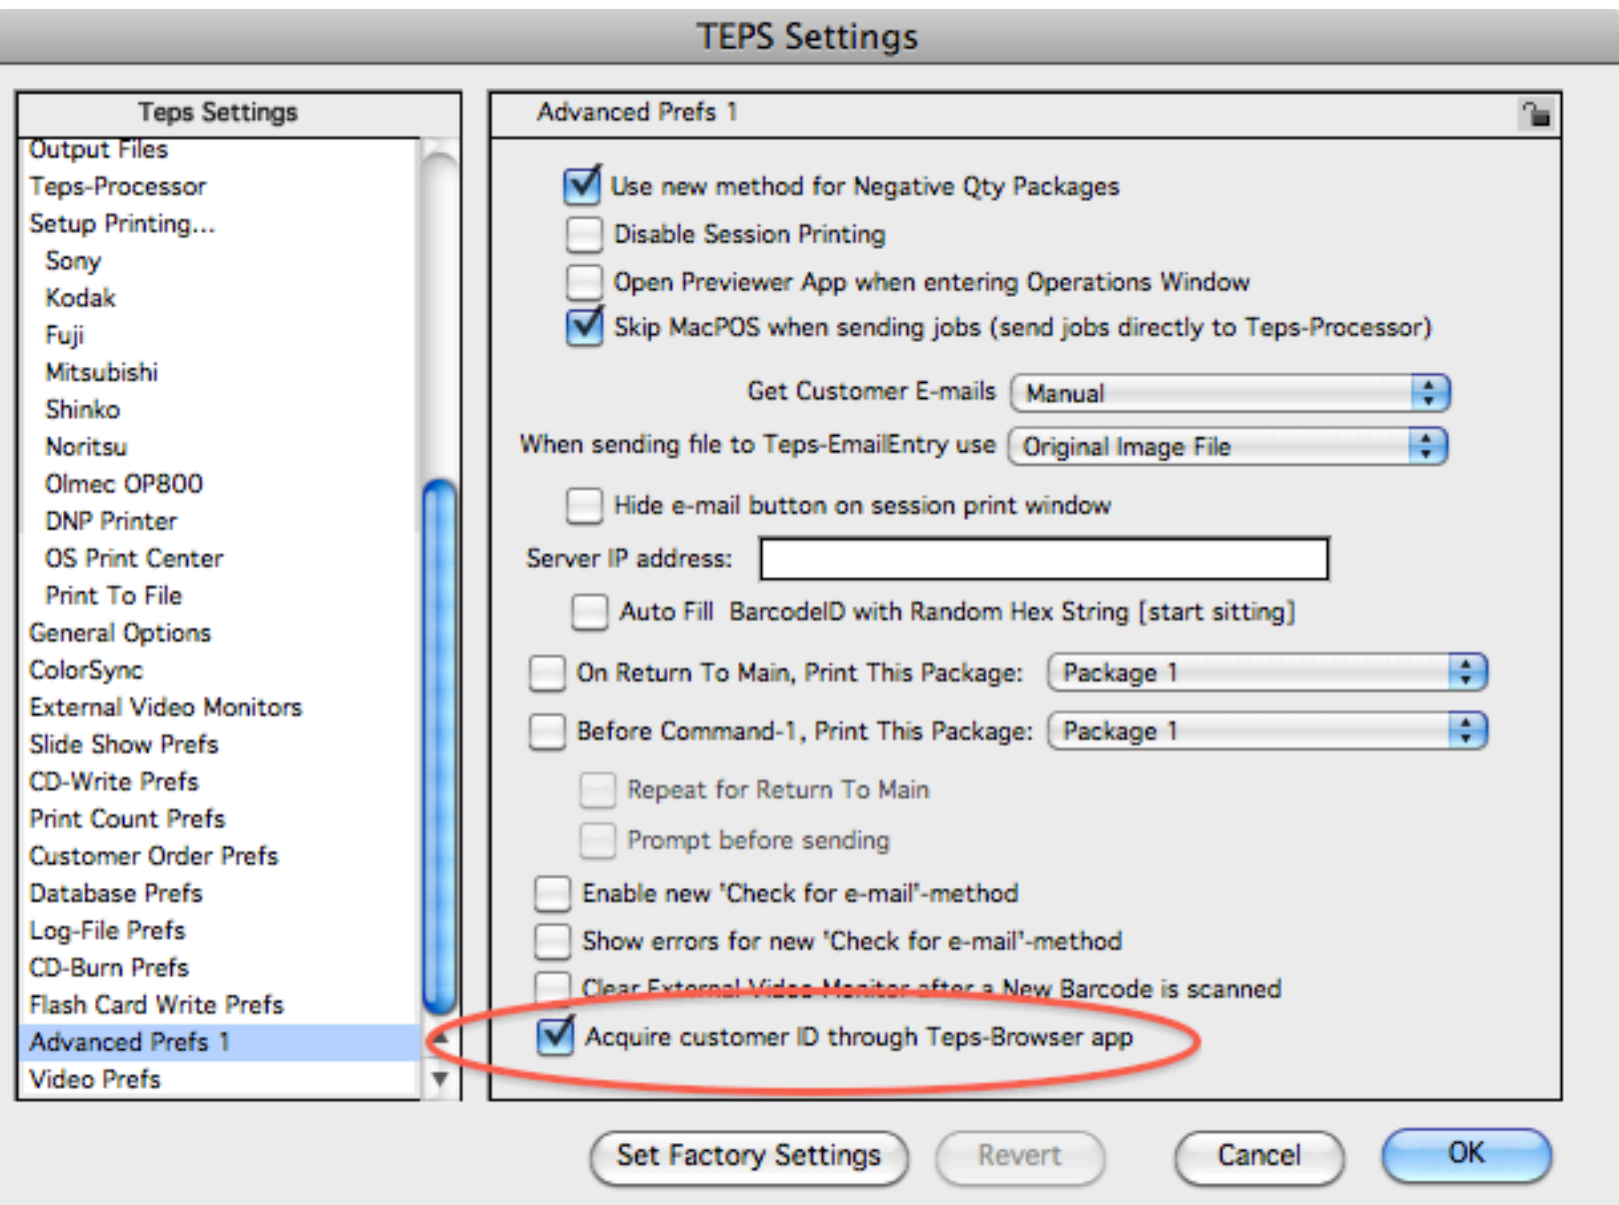

Need to add that key/value pair to your own POSHelper.plist

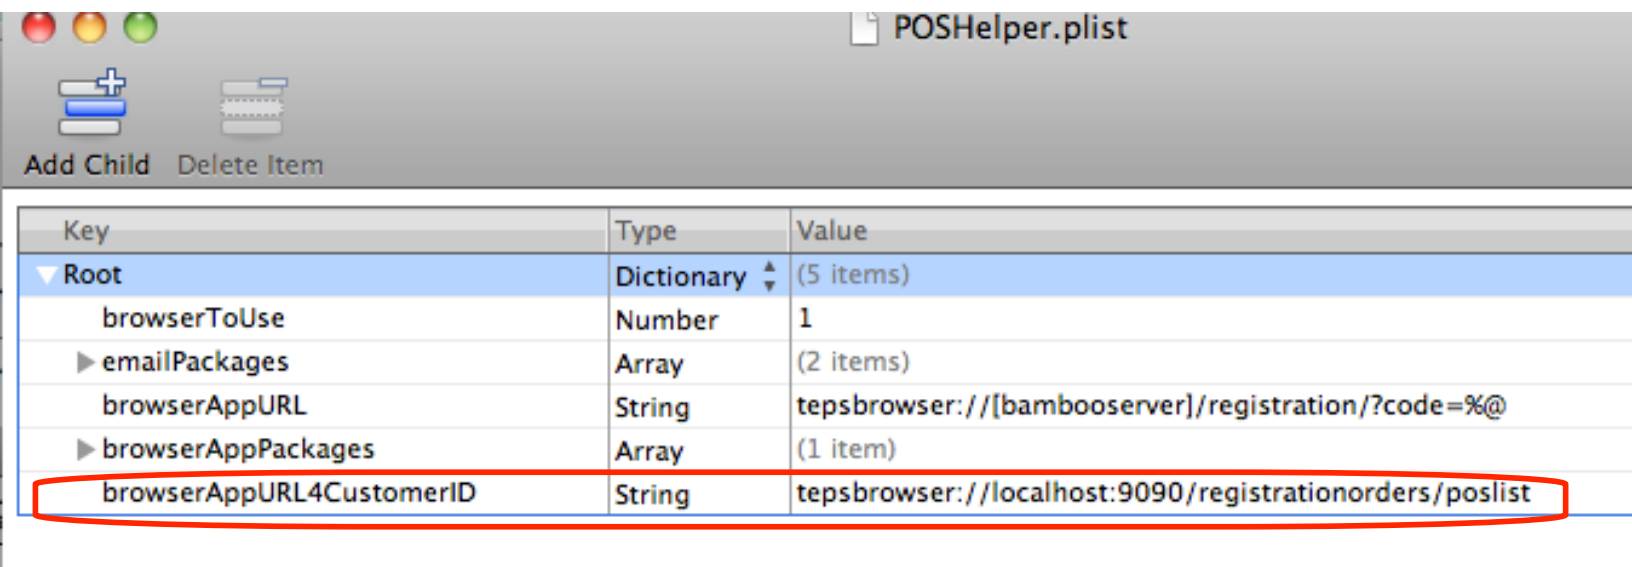

The screenshot shows a macOS window titled "POSHelper.plist" with a toolbar containing "Add Child" and "Delete Item" buttons. Below the toolbar is a table with three columns: "Key", "Type", and "Value". The table contains the following data:

Key	Type	Value
▼ Root	Dictionary (5 items)	
browserToUse	Number	1
▶ emailPackages	Array (2 items)	
browserAppURL	String	tepsbrowser://[bambooserver]/registration/?code=%@
▶ browserAppPackages	Array (1 item)	
browserAppURL4CustomerID	String	tepsbrowser://localhost:9090/registrationorders/poslist